

II. / , ()
/ , (20 %
).

III. 100 %.

9

10

72 60

11

, , , 70 %
30 40 °C.
— 6
: « » , , .27

!

75-013-IP30-SENSOR


« »

1
1.1 75-013-IP30-SENSOR
1.2 220 50
1.3
1.4 (EAC),
1.5 II
1.6 60598-1-2011. 3.1 15150-69,

2
 — 165...265 , 50
 — 11
 — 3
 — 1500
 — 1350
 — (52 ± 5) ()
 — 45...140 ()
 (cos) — > 0,9
 — IP30
 : -40 +40 °
 UL94 — v2
 , x x — 182 x 110 x 41,6

3
 75-013-IP30-SENSOR — 1
 — 1
 — 1

4 75-013-IP30-SENSOR
 ()
 1.
 , , ,

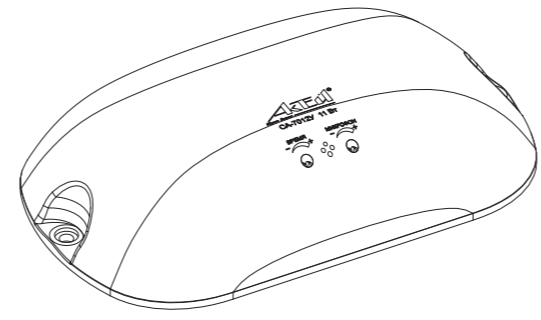


1— 75-013-IP30-SENSOR

5
5.1
5.2
5.3 40 40 °
5.4
6
6.1
6.2
6.3 ()

7
7.1 5 ()
7.2
7.3
7.4
7.5 2,
7.6 3.
7.7
7.8 4.
 ()
 5,
7.9 « »

	I	II	III
()	●	●	
	○	●	
	●	○	


2—



3—


75-013-IP30-SENSOR

75-013-IP30-SENSOR

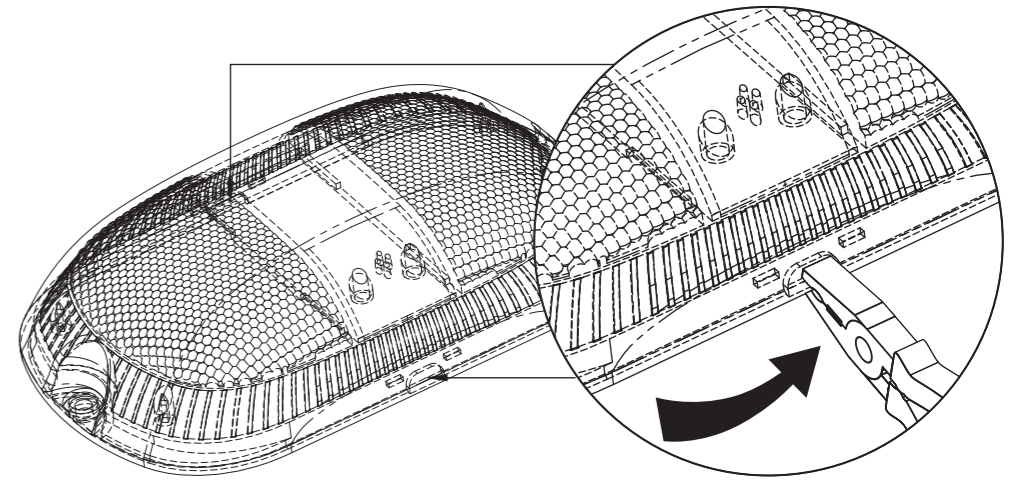

4—

75-013-IP30-SENSOR

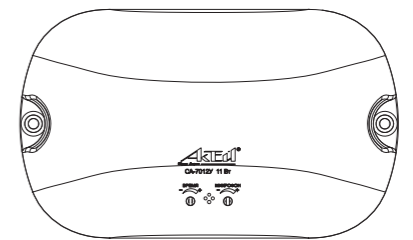

5—

75-013-IP30-SENSOR

7.10 ()
 « » « »

8
I. ()
 / ,